




Large levitating motorized screen

Features

- Suspended external mount
- Versatile deployment, maximizing space utilization
- Control options: RF Remote, RS485, Dry contact control
- Up to 16' or 5m (195") drop
- Flown and ceiling mount options available

Compatible power sources

Available in 110v AC or internationally in 220v AC



110v / 220v AC

Aspect Ratios

16:9 | 16:10


Environment

Operating temperature range is normal ambient (32 to 110 degrees), and humidity levels up to 90%. Designed for dry settings only

Passed third party fire performance evaluation in accordance with underwriters laboratories (UL) 2043-13, fire test for heat and visible smoke release for discrete products and their accessories installed in air-handling spaces

Materials

- Pure White 1.3

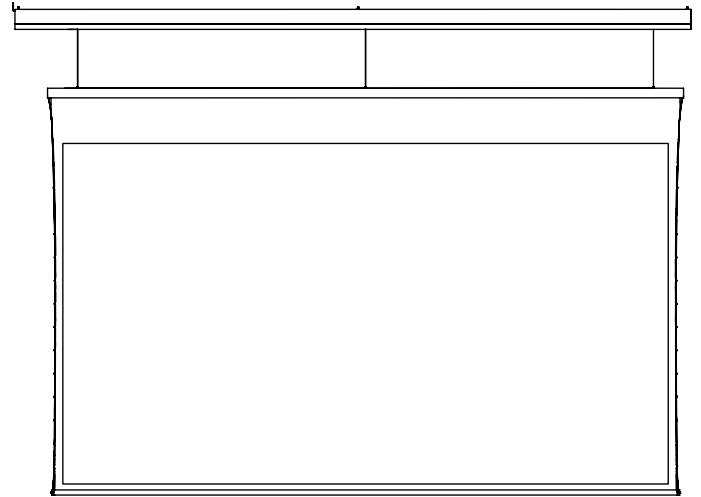

Zero G Pro specifications

For illustration purposes only

Cassette Colors

White

Sizes


Min: 150" (3810 mm) | Max: 300" (7620 mm)

Available in 1" increments. All sizes are measured diagonally. Some materials may be limited in size. All dimensions are listed as seamless.

Methods of Control

- RF Remote
- Dry Contact
- RS485

Screen Sizes and Measurements

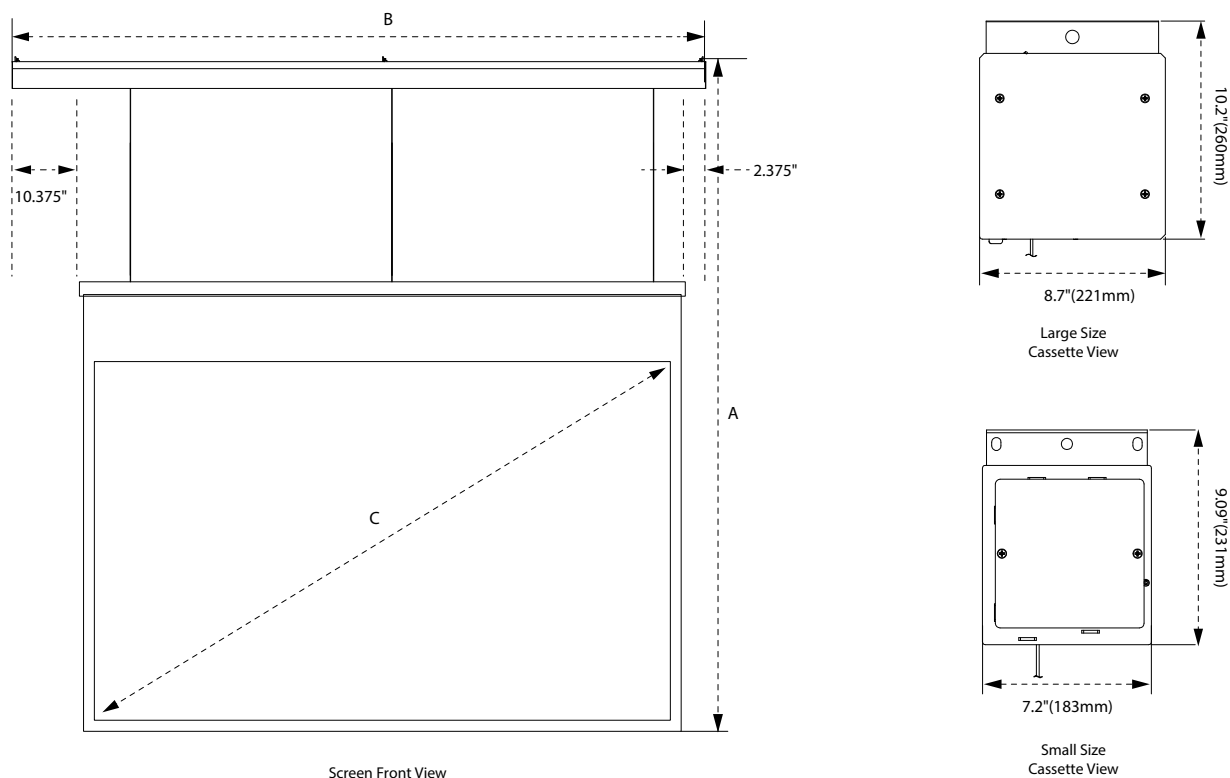

Theatre HDTV (16:9) Format Dimensions

Standard Diagonal (C) Overall Case Length (B) Overall Product Height (A) Cassette Size

In.	mm	In.	mm	In.	mm	Small / Large
180"	4572	176.7"	4489	319.2"	8107	Small
200"	5080	194.2"	4932	329"	8357	Small
250"	6350	240.3"	6103	356.8"	9064	Large
300"	7620	282.2"	7168	380.4"	9663	Large

Wide (16:10) Format Dimensions

Standard Diagonal (C) Overall Case Length (B) Overall Product Height (A) Cassette Size

In.	mm	In.	mm	In.	mm	Small / Large
150"	3810	147"	3735	310.4"	7885	Small
180"	4572	172.4"	4381	326.3"	8289	Small
200"	5080	189.4"	4812	336.9"	8558	Small
250"	6350	234.3"	5953	366.7"	9316	Large
300"	7620	276.7"	7030	393.3"	9990	Large

Screen materials may expand and contract slightly over time. SI allows a 1.5% tolerance within the viewing surface.